



This PDF is generated automatically by **Vizle**.  
Slides created *only for a few minutes* of your Video.



For the full PDF, please **Login to Vizle**.


<https://vizle.offnote.co> (Login via Google, top-right)

**Stay connected** with us:

Join us on **Facebook, Discord, Quora, Telegram**.





vizle

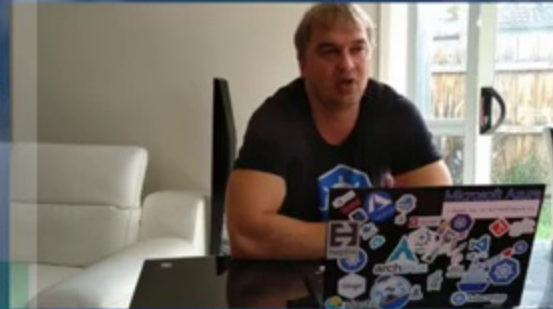






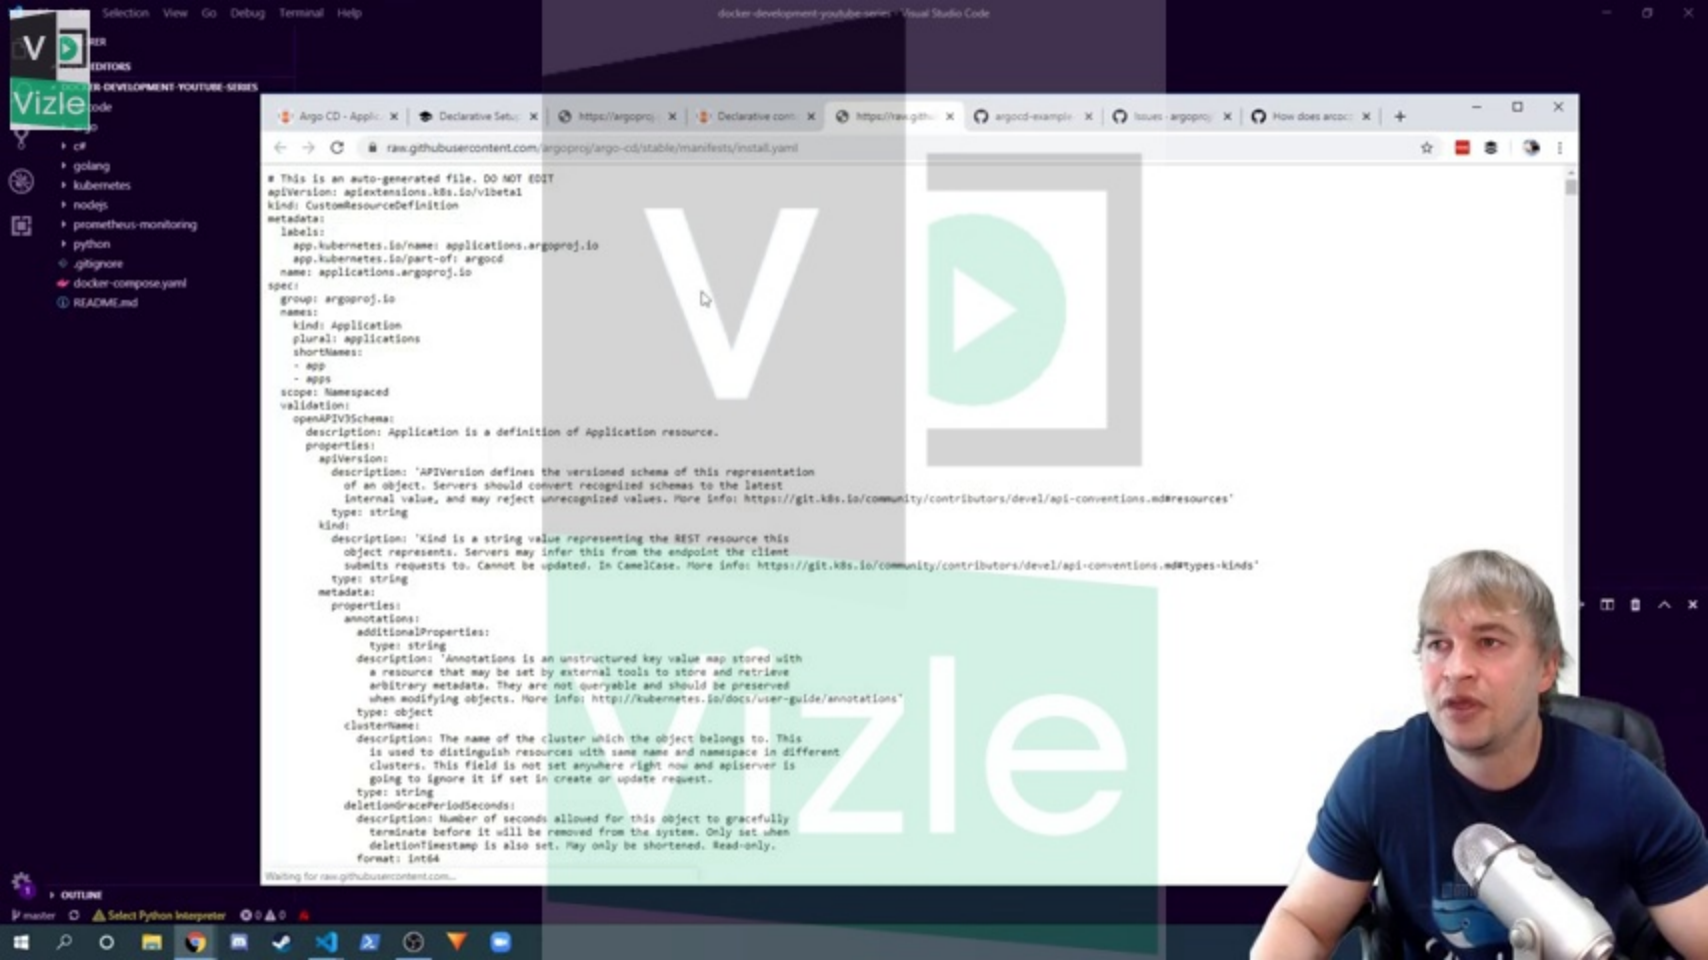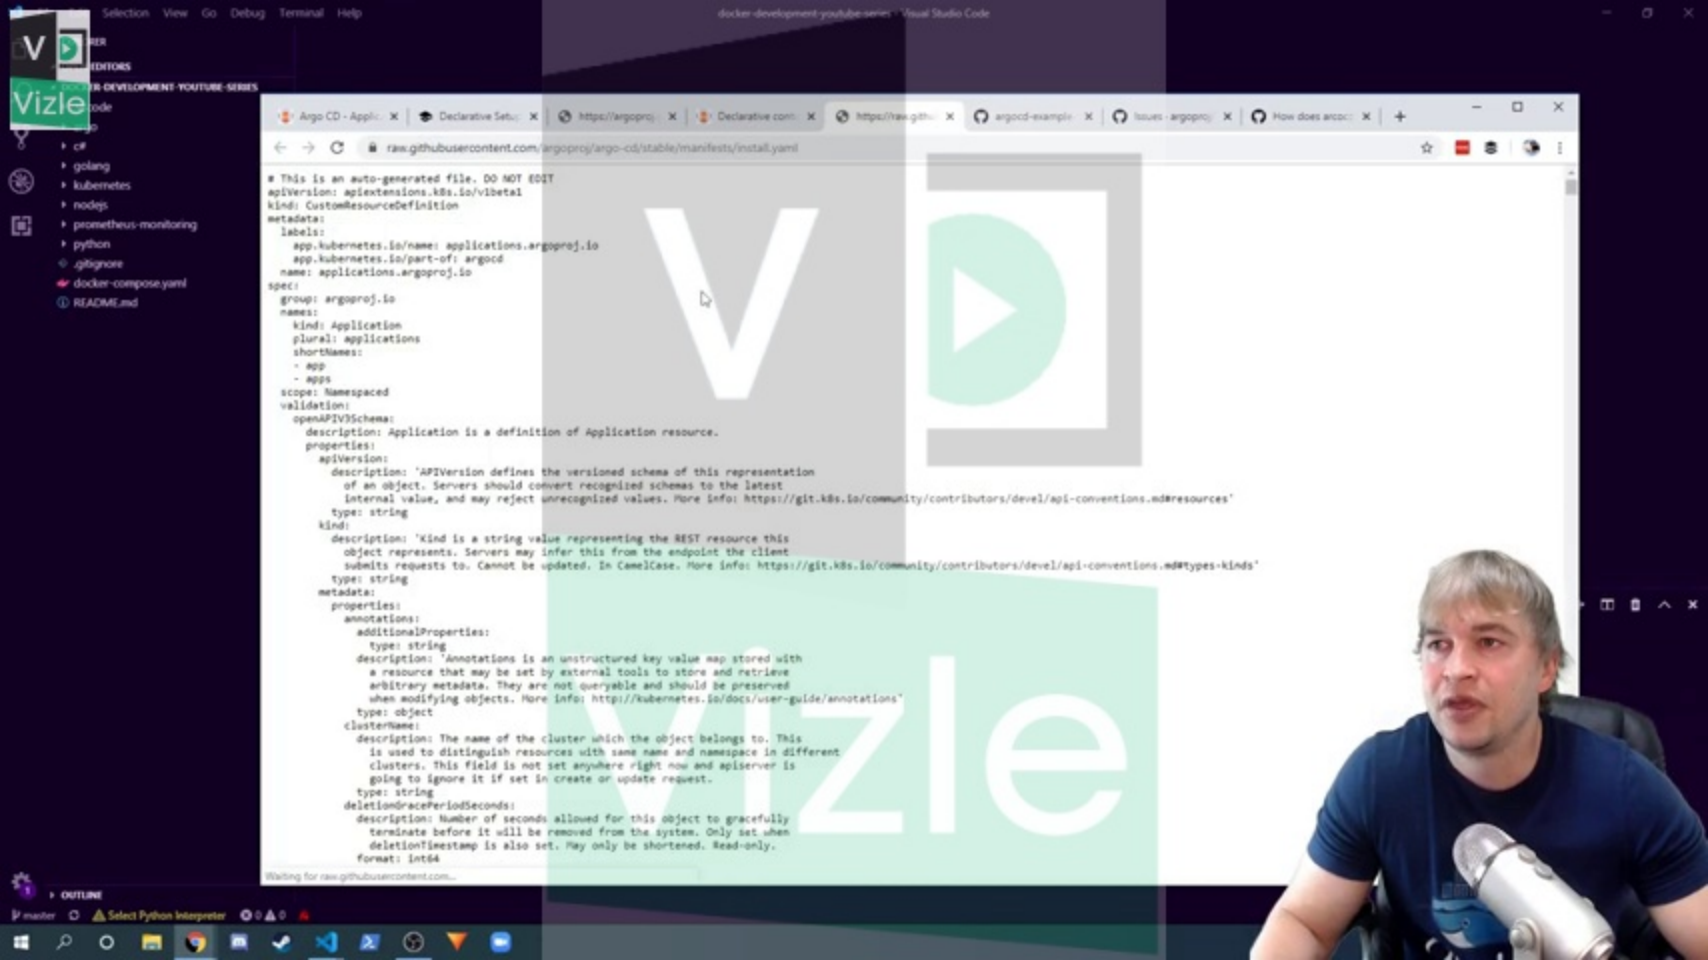


```

# This is an auto-generated file, DO NOT EDIT
apiVersion: apiextensions.k8s.io/v1beta1
kind: CustomResourceDefinition
metadata:
  labels:
    app.kubernetes.io/name: applications.argoproj.io
    app.kubernetes.io/part-of: argocd
  name: applications.argoproj.io
spec:
  group: argoproj.io
  names:
    kind: Application
    plural: applications
    shortNames:
    - app
    - apps
  scope: Namespaced
  validation:
    openAPIV3Schema:
      description: Application is a definition of Application resource.
      properties:
        apiVersion:
          description: 'APIVersion defines the versioned schema of this representation
            of an object. Servers should convert recognized schemas to the latest
            internal value, and may reject unrecognized values. More info: https://git.k8s.io/community/contributors/devel/api-conventions.md#resources'
          type: string
        kind:
          description: 'Kind is a string value representing the REST resource this
            object represents. Servers may infer this from the endpoint the client
            submits requests to. Cannot be updated. In CamelCase. More info: https://git.k8s.io/community/contributors/devel/api-conventions.md#types-kinds'
          type: string
        metadata:
          properties:
            annotations:
              additionalProperties:
                type: string
              description: 'Annotations is an unstructured key value map stored with
                a resource that may be set by external tools to store and retrieve
                arbitrary metadata. They are not queryable and should be preserved
                when modifying objects. More info: http://kubernetes.io/docs/user-guide/annotations'
              type: object
            clusterName:
              description: The name of the cluster which the object belongs to. This
                is used to distinguish resources with same name and namespace in different
                clusters. This field is not set anywhere right now and apiserver is
                going to ignore it if set in create or update request.
              type: string
            deletionGracePeriodSeconds:
              description: Number of seconds allowed for this object to gracefully
                terminate before it will be removed from the system. Only set when
                deletionTimestamp is also set. May only be shortened. Read-only.
              format: int64

```

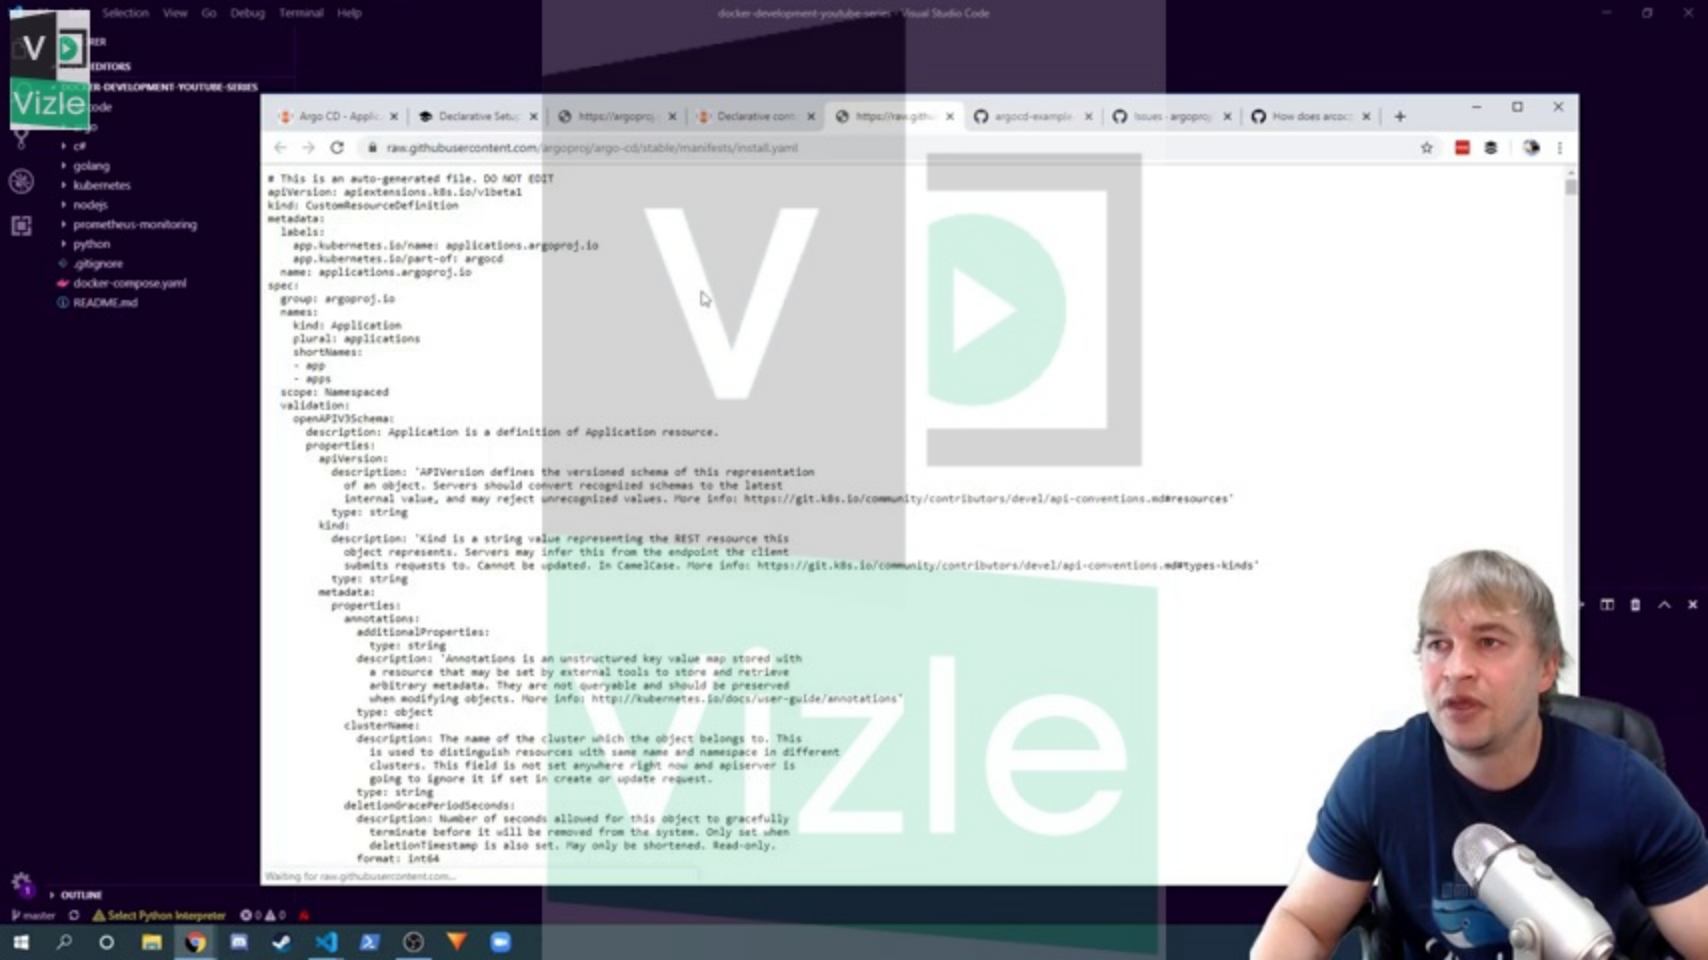

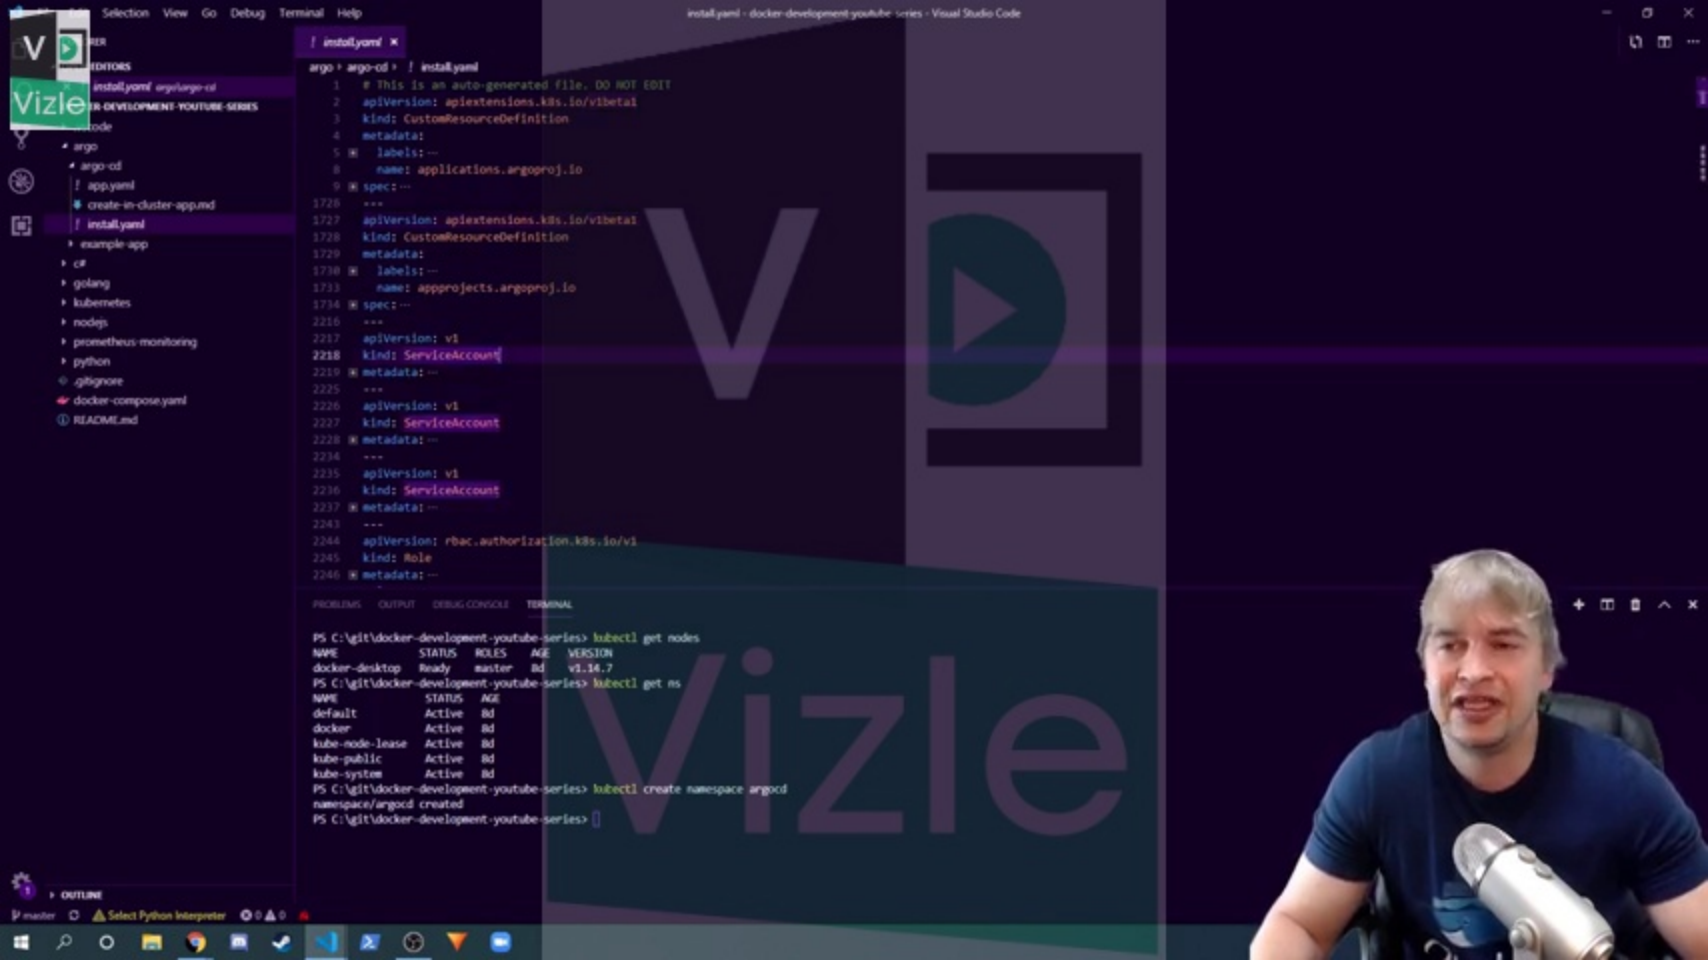

VIZLE

EDITORS

- install.yaml argo-argo-cd
- create-in-cluster-app.yaml
- example-app
- cf
- golang
- kubernetes
- nodejs
- prometheus-monitoring
- python
- .gitignore
- docker-compose.yaml
- README.md

```

install.yaml x
argo + argo-cd + / install.yaml
1 # This is an auto-generated file. DO NOT EDIT
2 apiVersion: apixextensions.k8s.io/v1beta1
3 kind: CustomResourceDefinition
4 metadata:
5   labels: --
6   name: applications.argoproj.io
7   spec: --
8   ---
9   1726
10  1727 apiVersion: apixextensions.k8s.io/v1beta1
11  1728 kind: CustomResourceDefinition
12  1729 metadata:
13  1730   labels: --
14  1731   name: appprojects.argoproj.io
15  1734   spec: --
16  2216   ---
17  2217   apiVersion: v1
18  2218   kind: ServiceAccount
19  2219   metadata: --
20  2225   ---
21  2226   apiVersion: v1
22  2227   kind: ServiceAccount
23  2228   metadata: --
24  2234   ---
25  2235   apiVersion: v1
26  2236   kind: ServiceAccount
27  2237   metadata: --
28  2243   ---
29  2244   apiVersion: rbac.authorization.k8s.io/v1
30  2245   kind: Role
31  2246   metadata: --

```

```


PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
PS C:\git\docker-development-youtube-series> kubectl get nodes
NAME                STATUS    ROLES    AGE   VERSION
docker-desktop     Ready    master   8d    v1.14.7
PS C:\git\docker-development-youtube-series> kubectl get ns
NAME                STATUS    AGE
default             Active   8d
docker              Active   8d
kube-node-inuse     Active   8d
kube-public         Active   8d
kube-system         Active   8d
PS C:\git\docker-development-youtube-series> kubectl create namespace argocd
namespace/argocd created
PS C:\git\docker-development-youtube-series>

```



Vizle





```
1  argo-cd > ! app.yaml
2  apiVersion: argoproj.io/v1alpha1
3  kind: Application
4  metadata:
5    name: example-app
6    namespace: argocd
7  spec:
8    project: default
9    source:
10     repoURL: https://github.com/marcel-dempers/docker-development-youtube-series.git
11     targetRevision: HEAD
12     path: argo/example-app
13     directory:
14       recurse: true
15     destination:
16       server: https://kubernetes.default.svc
17       namespace: example-app
18     syncPolicy:
19       automated:
20         prune: false
21         selfHeal: false
```

GitOps as Code

This PDF is generated automatically by **Vizle**.  
Slides created *only for a few minutes* of your Video.



For the full PDF, please **Login to Vizle**.

<https://vizle.offnote.co> (Login via Google, top-right)

**Stay connected** with us:

Join us on **Facebook, Discord, Quora, Telegram**.